
Oakland Alameda Access Project

Providing Access and Connections







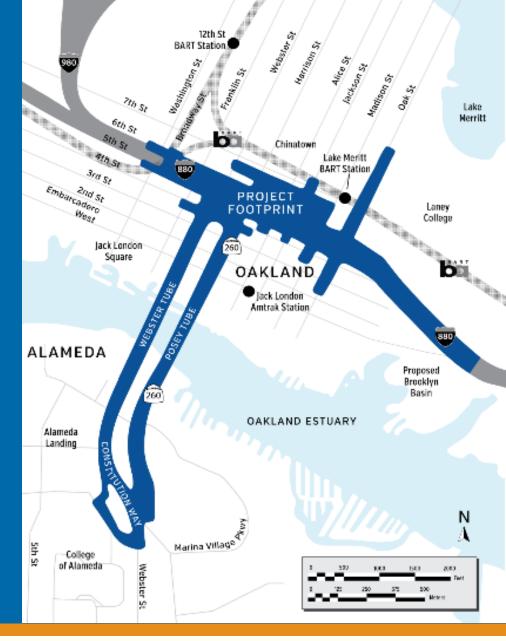





Project Purpose and Need

- Improve multimodal <u>safety</u> and reduce conflicts between regional and local traffic
- Enhance bicycle and pedestrian <u>accessibility and connectivity</u> within the project study area
- Improve mobility and accessibility for travelers between I-880, SR-260,
 City of Oakland downtown neighborhoods, and the City of Alameda
- <u>Reduce freeway-bound regional traffic</u> and congestion on local roadways and in area neighborhoods










Major Roadway Improvements

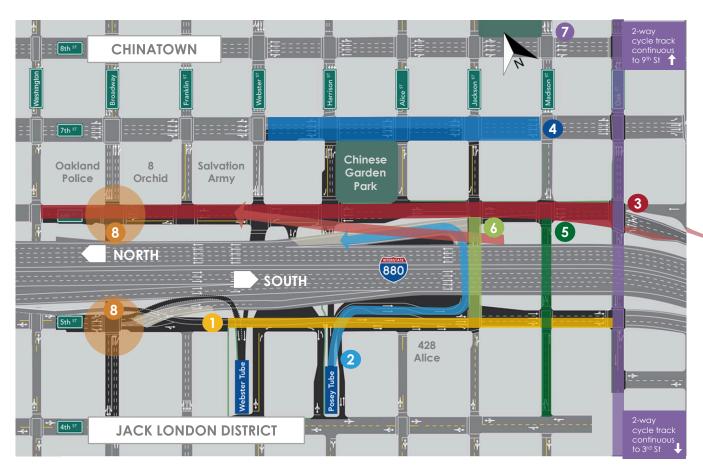

- **Realign** WB I-980 Jackson St off-ramp and reconstruct 5th St
- 2 Construct right-turn from Posey Tube onto Horseshoe to NB Jackson St on-ramp
- Widen NB I-880 Oak off-ramp, remove NB I-880 Broadway off-ramp, reconstruct 6th St for multi-modal access (Oak St to Washington St)
- 4 **Restripe** 7th St and improve intersections
- **Restripe** Madison for 2-way travel between 4th to 6th St
- **Restripe** Jackson for 1-way between 5th to 6th
- Restripe Oak St for multimodal access (2-way cycle track from 3rd to 9th St)
- **Reconfigure** intersections at Broadway and 6th and 5th St











Project Design – Selected Areas



Removal of the northbound I-880 off-ramp

Class IV Cycle Track

Removal of the northbound I-880 Broadway off-ramp

Relocation of westbound I-980 Jackson Street off-ramp to the west along 5th Street





Extension of 6th Street

Horseshoe connector under I-880

Reconstruction of east wall to construct right-turn from Posey Tube onto northbound I-880 Jackson Street on-ramp















Types of Bicycle Facility

This project will add over 1.9 miles of new bike facilities and 0.7 miles of new sidewalks in Oakland!

Class I Shared-Use Path



0.5 mile

Class IIIBike Lane (incl. sharrow, Bike Blvd.)



0.2 mile

Class IIBike Lane (incl. protected lane)



0.4 mile

Class IV
Cycle Track



0.8 mile












Bike/Ped Safety and Access Improvements in Oakland

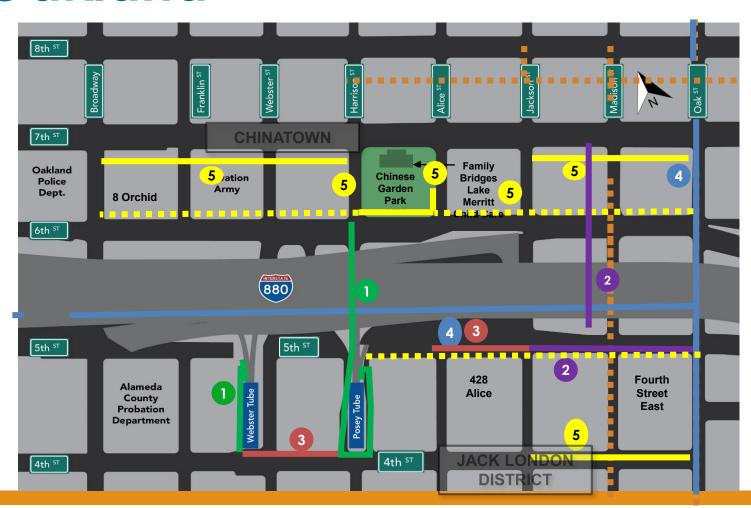

- Existing sidewalk
- Existing bike facility
- Class I 0.5 miles
- 2 Class II 0.4 miles
- 3 Class III 0.2 miles
- 4 Class IV 0.8 miles
- 5 New sidewalk 0.7 miles












Bike/Ped Safety and Access Improvements in Alameda

- Widen and open **walkway** through Webster Tube and along Webster Street connecting to Mariner Square Loop (0.8 miles)
- New **Class II** bike lane on Mariner Square Loop (0.3 miles)
- Add crosswalks to connect ped/bike paths
- New Class I path: Realign and widen path to 8 feet (0.3 miles)
- Sidewalk extension on
 Mariner Square Loop and Mariner
 Square Drive (0.3 miles)



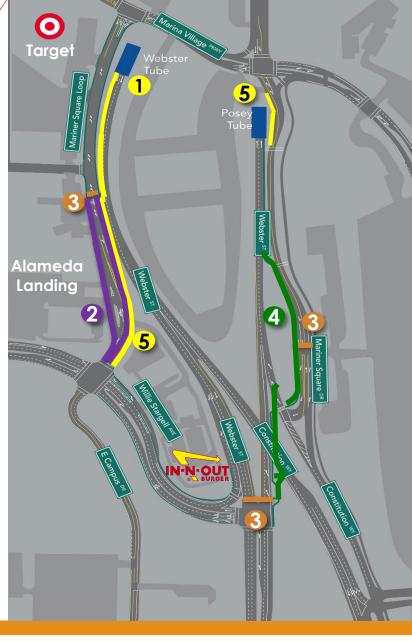













Tube Improvements

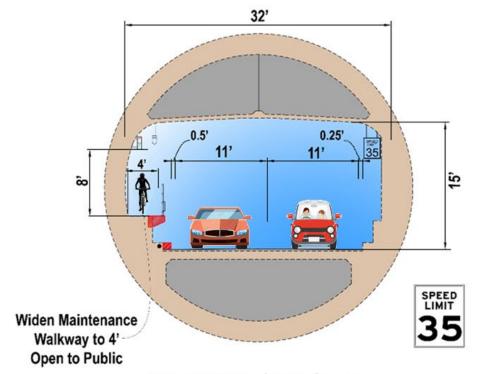

Webster Tube Cross-Section

Section D - Looking North Towards Oakland

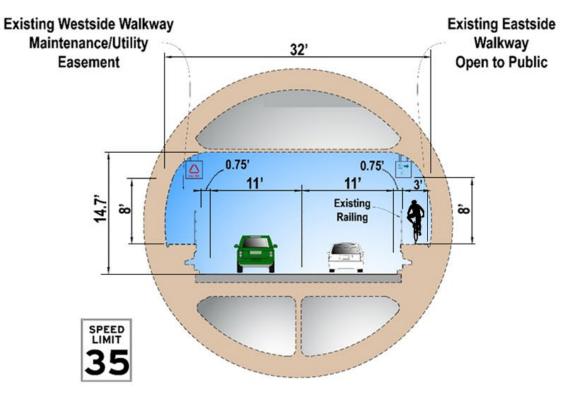

Posey Tube Cross-Section

Section D - Looking North Towards Oakland












Aesthetics-Key Map

- Incorporating Standards for Treatment of Historic Properties including Posey Tube
- Adhering to Built Environment Treatment Plan
- Compliance with Section 106 of the National Historic Preservation Act

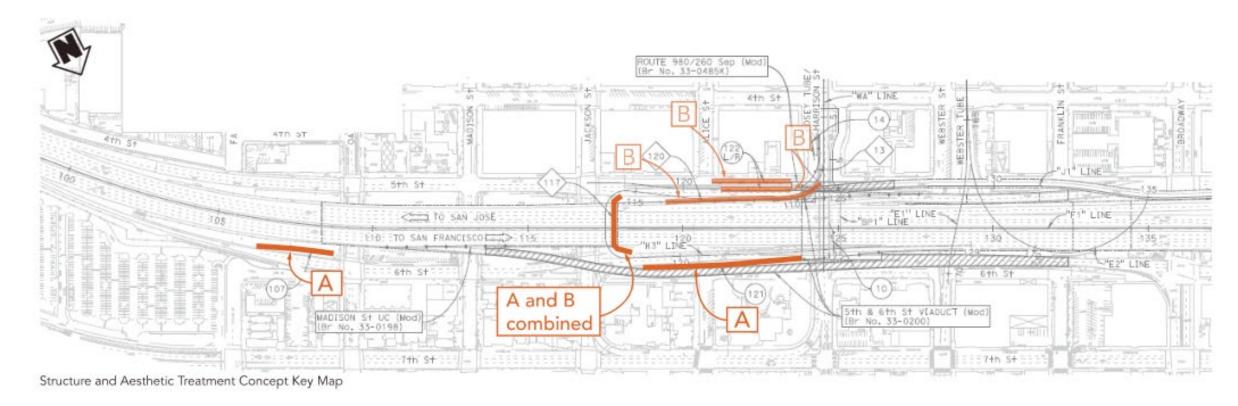












Aesthetics-Concept A (north of I-880)

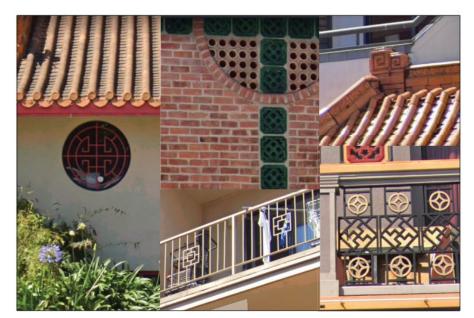

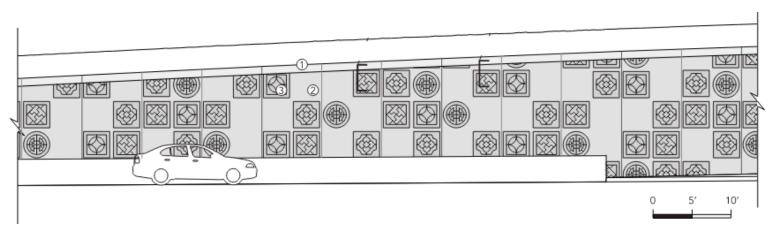

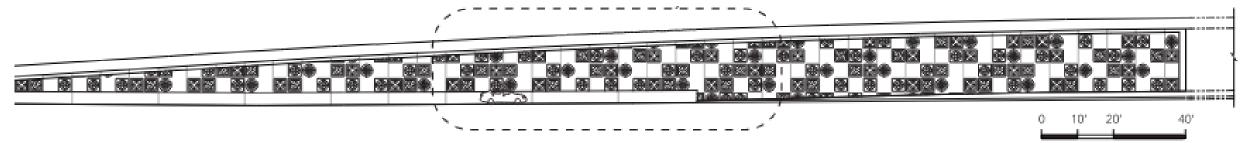











Aesthetics-Concept B (south of I-880)

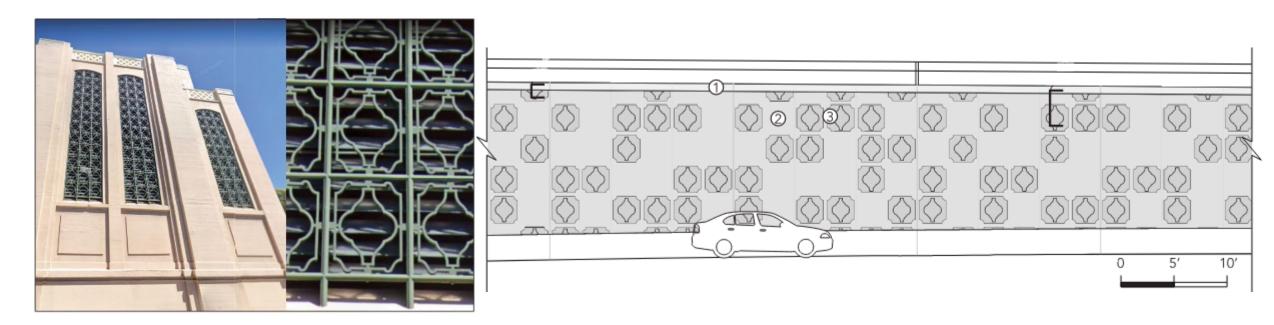

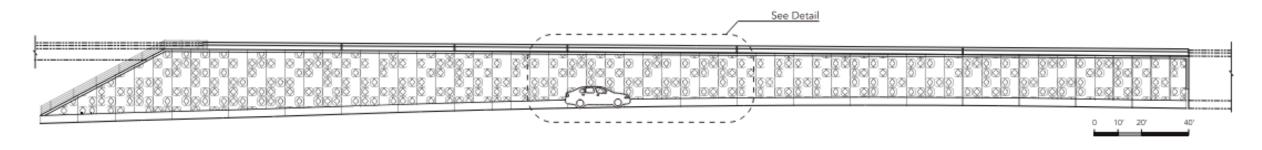













Construction Schedule

	2025				2026				2027			
	Winter	Spring	Summer	Fall	Winter	Spring	Summer	Fall	Winter	Spring	Summer	Fall
Stage 1												
Stage 2	-			_								










Construction - Stage 1

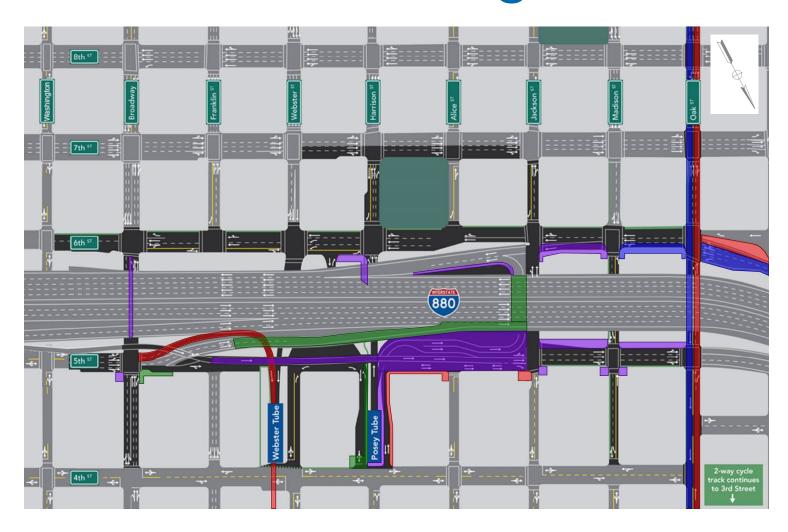

Duration (1.5 YEARS)

STAGE 1A ~ 2 MONTHS

- OAK STREET OFF RAMP
- OAK STREET AND 5TH STREET
- MARINER SQUARE LOOP
- WEBSTER TUBE IMPROVEMENTS

STAGE 1B ~ 2 MONTHS

- OAK STREET OFF RAMP
- OAK STREET AND 6TH STREET
- 980-260 GRADE SEP Mod DEMOLITION
- MARINER SQUARE LOOP

STAGE 1C ~ 8 MONTHS

- DEMOLISH BROADWAY OFF RAMP VIADUCT
- JACKSON STREET HORSESHOE
- 980-260 GRADE SEP Mod IMPROVEMENTS
- 5TH STREET AND HARRISON STREET
- POSEY TUBE IMPROVEMENTS

STAGE 1D ~ 6 MONTHS

- JACKSON STREET HORSESHOE
- 5TH STREET AND HARRISON STREET
- 980-260 GRADE SEP Mod IMPROVEMENTS
- POSEY TUBE IMPROVEMENTS
- BROADWAY IMPROVEMENTS











Construction – Stage 2



Duration (1 YEAR)

STAGE 2A ~ 3 MONTHS

- DEMOLISH BROADWAY OFF RAMP
- ALICE STREET AND 6TH STREET
- 7TH STREET ADA IMRPOVEMENTS

STAGE 2B ~ 4 MONTHS

- NB 880 OUTSIDE BARRIER
- JACKSON AND ALICE STREET
- 6TH AND HARRISON STREET
- WEBSTER STREET
- BROADWAY IMPROVEMENTS

STAGE 2C ~ 2 MONTHS

- 6TH AND WEBSTER STREET
- HARRISON STREET IMPROVEMENTS

STAGE 2D ~ 3 MONTHS

- 6TH AND 7TH STREET
- MADISON AND JACKSON STREET
- ALICE AND HARRISON STREET
- WEBSTER AND FRANKLIN STREET
- BROADWAY IMPROVEMENTS












I-980 Jackson Street Off Ramp Detour

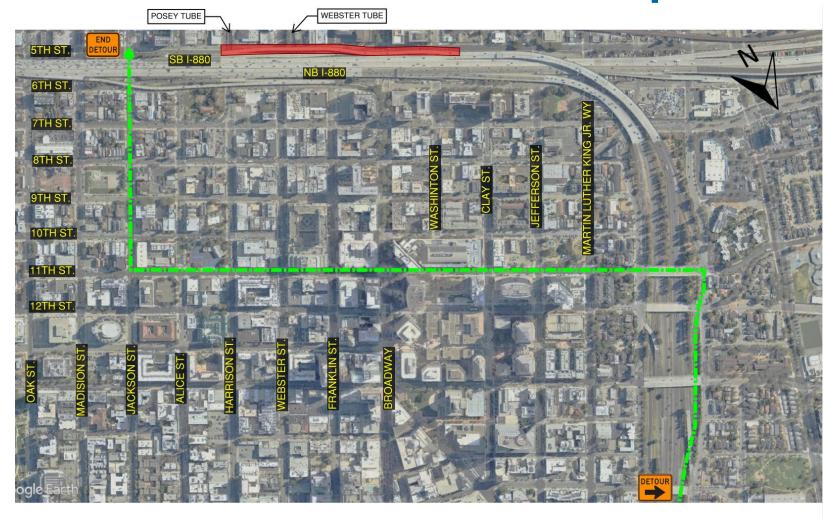

- Approximately 1 year to Demolish existing structure, realign and construct new structure
- Detour will re-route drivers via 11th Street to Jackson Street









Oak Street Off-Ramp Detour



Nighttime and Weekend closures for ramp improvements

Detour will re-route drivers via Broadway Exit and loop back on 7th Street









SB I-880 On-Ramp Detour



- Approximately 6
 months to demolish
 and reconstruct
 retaining wall along SB
 I-880
- Detour will re-route drivers via 7th Street to Madison Street to 5th Street










Posey Tube Detour

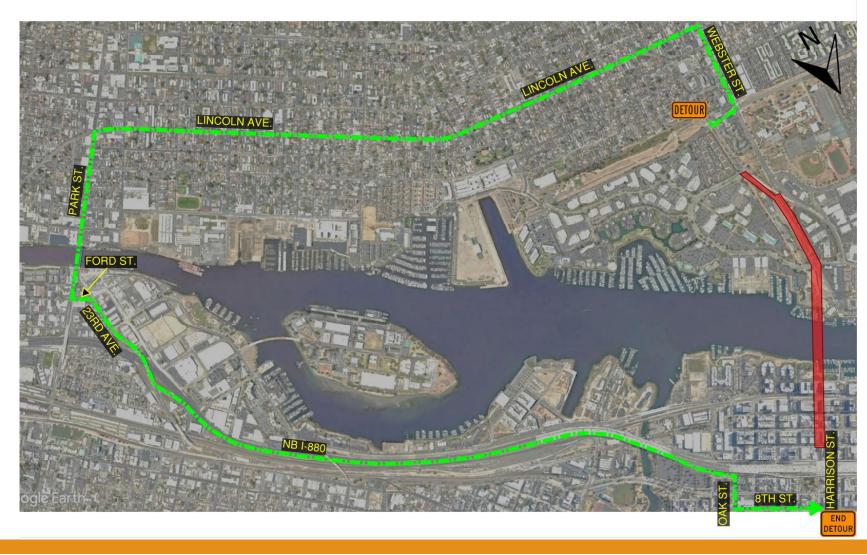

- > Nighttime and Weekend closures for structure demolition and traffic control set up
- Detour will re-route drivers via Lincoln Ave to Park Street to NB I-880 and exiting on Oak Street










Webster Tube Detour

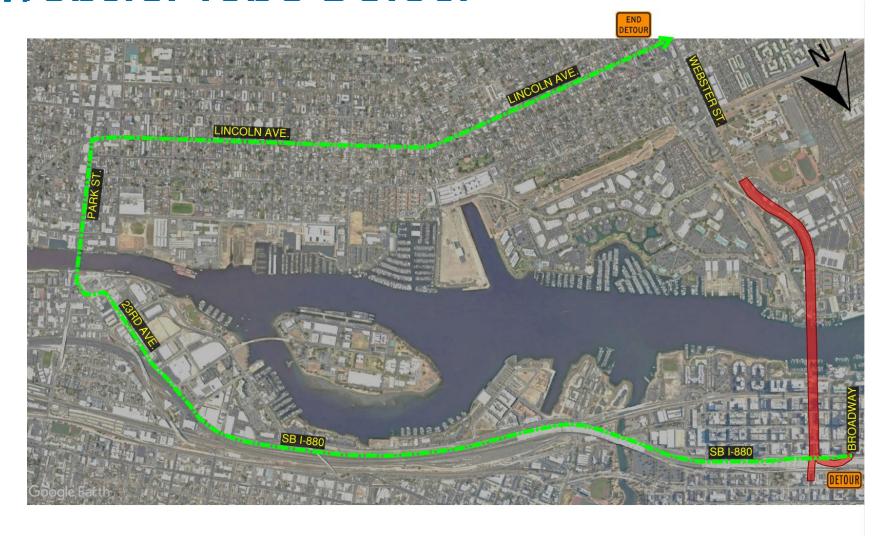

- Nighttime closures for traffic control set up
- Detour will re-route drivers via SB I-880 to 23rd Street to Park Street to Lincoln Ave









Maintaining Pedestrian and Bike Mobility



 Temporary Pedestrian Paths during construction will provide protected walkways around the construction work zones



 When existing Class I, II and IV bike facilities are impacted by construction activities Class III bike routes will be provided











Project Schedule

Project Milestone	Schedule By Phase
Scoping	Summer 2009 - Spring 2011
Preliminary Engineering/Environmental	Fall 2017 to Early 2022
Final Design	February 2022 to Fall 2024
Project Advertisement/Bidding Process	Early 2022 to Fall 2024
Construction	Spring 2025 to Late 2027

^{*}Design has achieved 65% milestone and is progressing to 95%











Funding Sources (\$ X 1,000)

Alameda CTC Local Funds	\$81,546
State	\$37,116
TBD	\$33,255
Total	\$151,917









Questions













Thank you!











