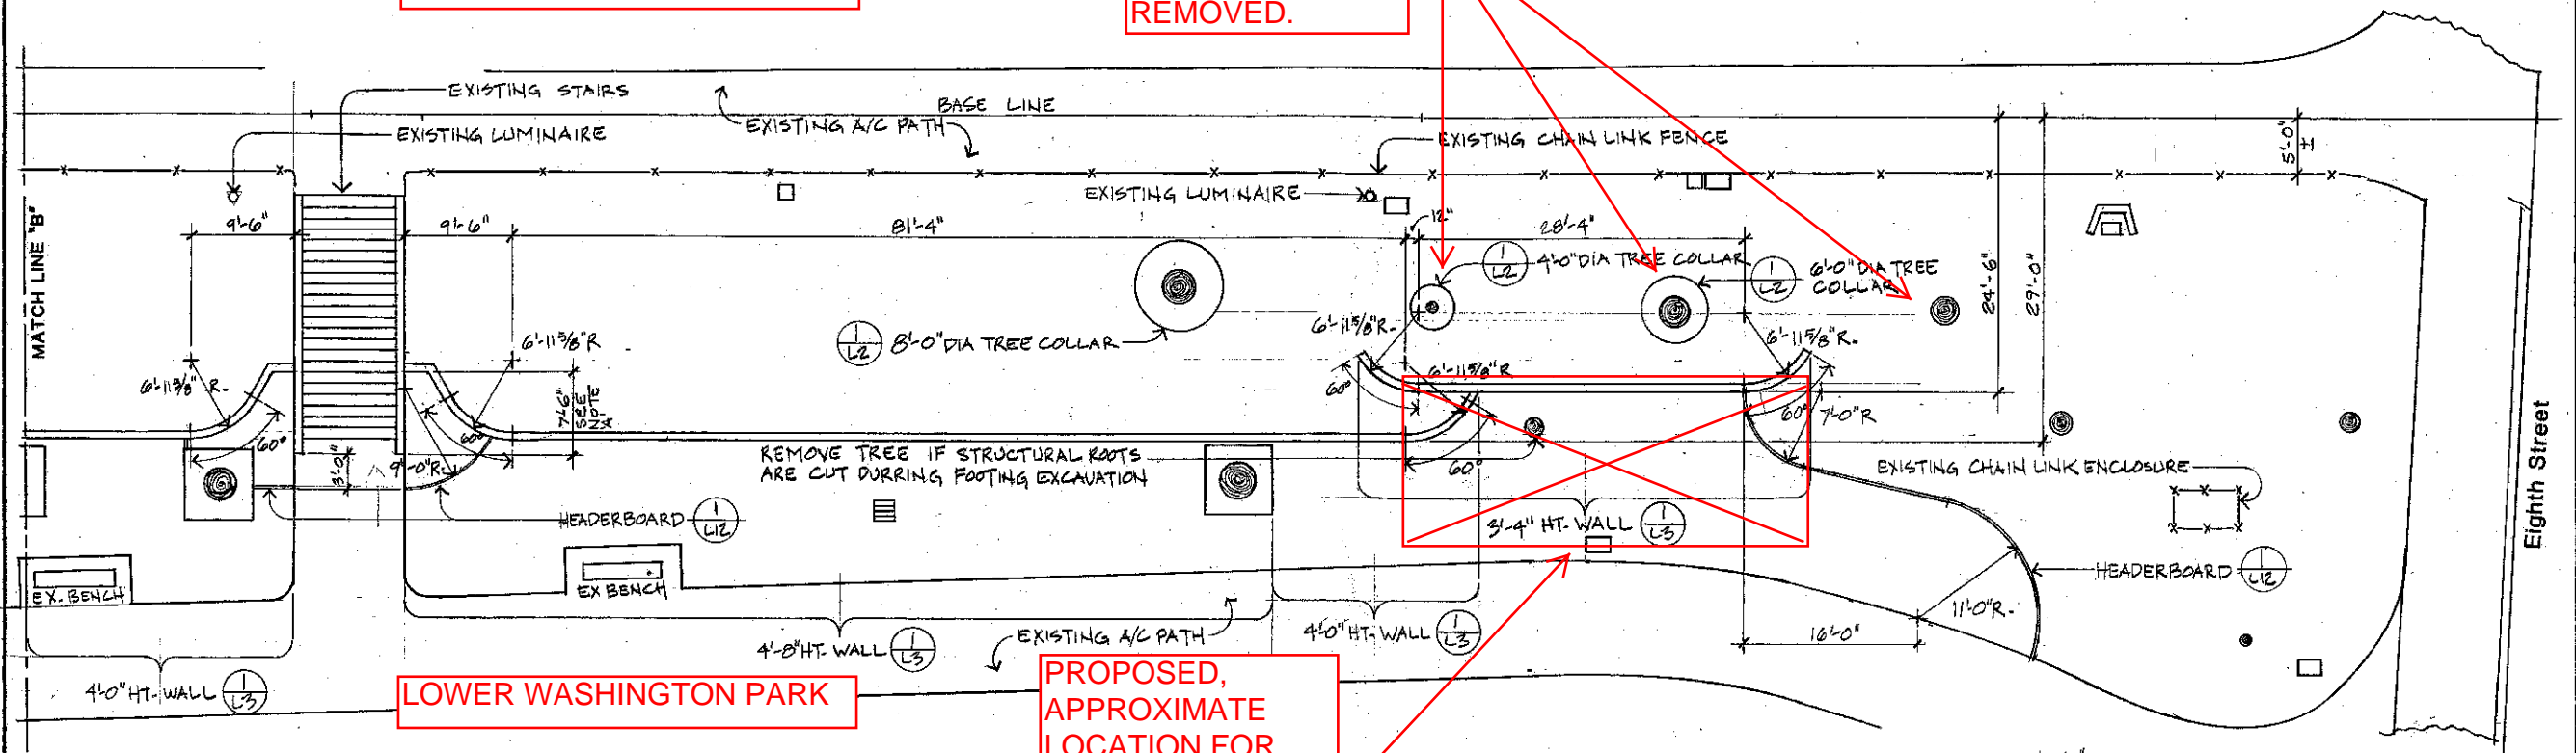EXHIBIT G

UPPER WASHINGTON PARK

THESE THREE TREES NO LONGER EXIST AND HAVE BEEN REMOVED.
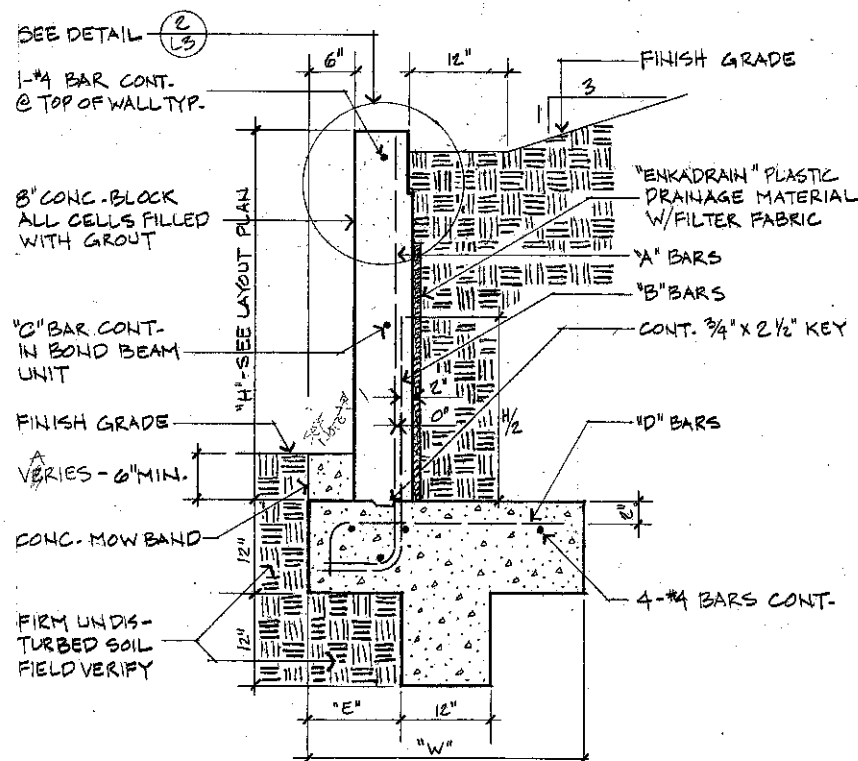
APPROXIMATE LOCATION OF THE EXISTING EIGHTH & PORTOLA PUMP STATION.
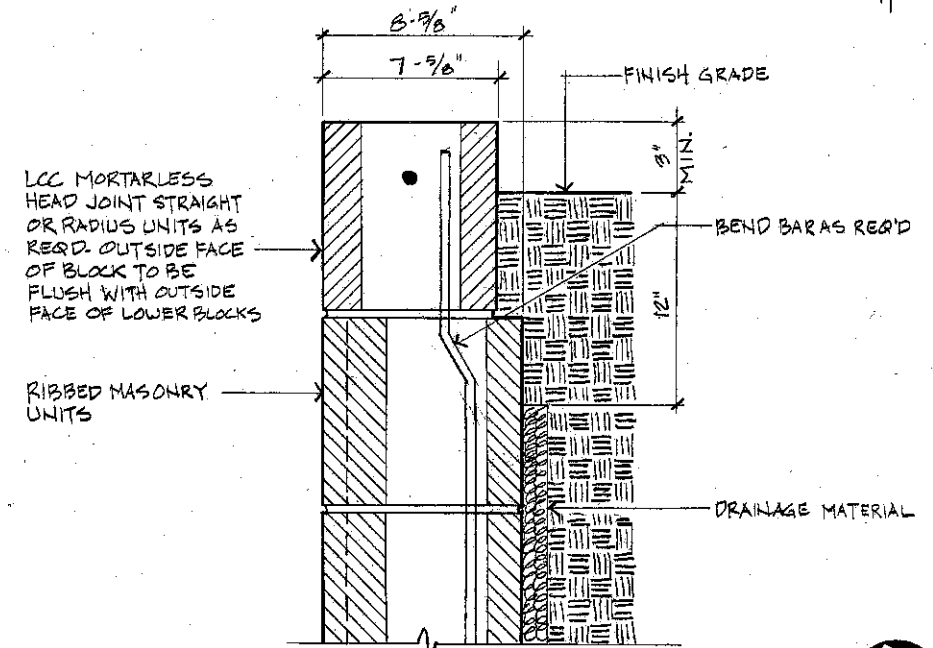
TREE TO REMAIN

MATCH LINE "B"

EXISTING STAIRS
EXISTING LUMINAIRE
EXISTING A/C PATH
BASE LINE
EXISTING LUMINAIRE
EXISTING CHAIN LINK FENCE

9'-6"
9'-6"
81'-4"
28'-4"
4'-0" DIA TREE COLLAR
6'-0" DIA TREE COLLAR
6'-11 5/8" R.
8'-0" DIA TREE COLLAR
6'-11 5/8" R.
6'-11 5/8" R.
6'-11 5/8" R.
60°
60°
60°
7'-0" R.
24'-6"
29'-0"
5'-0"

Eighth Street

REMOVE TREE IF STRUCTURAL ROOTS ARE CUT DURING FOOTING EXCAVATION

EXISTING CHAIN LINK ENCLOSURE

HEADERBOARD

EX. BENCH
EX BENCH

HEADERBOARD

4'-0" HT. WALL
4'-8" HT. WALL
EXISTING A/C PATH
4'-0" HT. WALL
3'-4" HT. WALL
11'-0" R.
16'-0"

PROPOSED, APPROXIMATE LOCATION FOR THE NEW EIGHTH & PORTOLA PUMP STATION.

LOWER WASHINGTON PARK

Retaining Wall Detail

SEE DETAIL 2/L3
1-#4 BAR CONT. @ TOP OF WALL TYP.
6"
12"
3
FINISH GRADE

8" CONC. BLOCK ALL CELLS FILLED WITH GROUT
"ENKADRAIN" PLASTIC DRAINAGE MATERIAL W/FILTER FABRIC
"A" BARS
"B" BARS
CONT. 3/4" x 2 1/2" KEY

"C" BAR CONT. IN BOND BEAM UNIT
FINISH GRADE
"D" BARS
A VARIES - 6" MIN.
CONC. MOW BAND
FIRM UNDISTURBED SOIL FIELD VERIFY
"H"-SEE LAYOUT PLAN
12"
12"
"E"
12"
"W"
4-#4 BARS CONT.

1 RETAINING WALL   NO SCALE
L3

SCHEDULE

HEIGHT "H"	W	E	A BARS	B BARS	C BARS	D BARS
3'-4"	2'-9"	0'-9"	#4@16"	—	#4@16"	#4@24"
4'-0"	3'-3"	1'-0"	#4@16"	—	#4@16"	#4@24"
4'-8"	3'-6"	1'-3"	#4@16"	—	#4@16"	#4@24"
5'-4"	4'-0"	1'-6"	#4@16"	#4@16"	#4@16"	#4@16"
5'-4" *	3'-6"	1'-3"	#4@16"	—	#4@16"	#4@24"

* LEVEL BACKFILL ONLY

NOTES: 1. OMIT HEAD JOINT MORTAR EVERY 4'-0" O.C. AS WEEP HOLES ON BLOCK COURSE ABOVE MOW BAND.
2. ALL DIMENSIONS SHOWN FOR LOCATION OF REINFORCING BARS ARE TO FACE OF BAR AND DENOTE CLEAR CONCRETE OR GROUT COVERAGE UNLESS OTHERWISE NOTED.
3. TOP OF WALL TO BE HORIZONTAL.

Retaining Wall Cap Detail

8-3/8"
7-5/8"
FINISH GRADE
3"
12"
MIN.

LCC MORTARLESS HEAD JOINT STRAIGHT OR RADIUS UNITS AS REQ'D. OUTSIDE FACE OF BLOCK TO BE FLUSH WITH OUTSIDE FACE OF LOWER BLOCKS

RIBBED MASONRY UNITS

BEND BAR AS REQ'D

DRAINAGE MATERIAL

2 RETAINING WALL CAP DETAIL   SCALE 3"=1'-0"
L3

EAST AREA   L-3

BENCH MARK
REFERENCES

CITY OF ALAMEDA
CALIFORNIA

WASHINGTON PARK
RETAINING WALL
LAYOUT PLAN

NO. REVISED BY APP.
DESIGNED GO
DRAWN GO
CHECKED
DATE

APPROVED BY
DATE AUG 4, 1987
SHEET 4 OF 17
DWG. 8190
CASE 71

1300 8th St

APPROXIMATE, PROPOSED LOCATION FOR NEW EIGHTH & PORTOLA SEWER PUMP STATION.

THIS TREE HAS BEEN REMOVED.

EIGHTH & PORTOLA SEWER PUMP STATION.

Image capture: Apr 2019   © 2020 Google

Alameda, California

Google

Street View

Pacific Pinball Museum